



# United States Department of the Interior

GEOLOGICAL SURVEY  
RESTON, VA. 22092

## REPORT OF CALIBRATION of Aerial Mapping Camera

March 23, 1983

Camera type:	Wild RC 10	Camera serial no.:	1758
Lens type:	Wild Universal Aviogon II	Lens serial no.:	UAg II 3019
Nominal focal length:	153 mm	Maximum aperture:	f/4
		Test aperture:	f/4

Submitted by: NASA, Ames Research Center  
Moffett Field, California 94035

Reference: NASA, Ames purchase order No. R/A-03352C (VJT)  
dated February 4, 1983.

These measurements were made on Kodak micro flat glass plates, 0.25 inch thick, with spectroscopic emulsion type V-F Panchromatic, developed in D-19 at 68° F for three minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

### I. Calibrated Focal Length: 153.196 mm

This measurement is considered accurate within 0.005 mm.

### II. Radial Distortion

Field angle	$\bar{D}_C$	$D_C$ for azimuth angle			
		0° A-C	90° A-D	180° B-D	270° B-C
degrees	um	um	um	um	um
7.5	-2	-3	-5	0	-1
15	-2	-5	-1	0	-1
22.5	-1	-3	-2	-3	1
30	2	1	0	2	6
35	1	-2	-1	0	5
40	0	0	5	-3	-3

The radial distortion is measured for each of four radii of the focal plane separated by 90° in azimuth. To minimize plotting error due to distortion, a full least-squares solution is used to determine the calibrated focal length.  $\bar{D}_C$  is the average distortion for a given field angle. Values of distortion  $D_C$  based on the calibrated focal length referred to the calibrated principal point (point of symmetry) are listed for azimuths 0°, 90°, 180° and 270°. The radial distortion is given in micrometers and indicates the radial displacement of the image from its ideal position for the calibrated focal length. A positive value indicates a displacement away from the center of the field. These measurements are considered accurate within 5 um.

### III. Resolving Power in cycles/mm

Area-weighted average resolution: 56.2

Field angle:	0°	7.5°	15°	22.5°	30°	35°	40°
Radial lines	113	95	80	57	80	57	17
Tangential lines	113	67	48	48	57	57	48

The resolving power is obtained by photographing a series of test bars and examining the resultant image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable confidence. The series of patterns has spatial frequencies from 5 to 268 cycles/mm in a geometric series having a ratio of the 4th root of 2. Radial lines are parallel to a radius from the center of the field, and tangential lines are perpendicular to a radius.

### IV. Filter Parallelism

The two surfaces of the Wild 520 Pan (no serial number) filter accompanying this camera are within ten seconds of being parallel. This filter was used for the calibration.


### V. Shutter Calibration

<u>Indicated shutter speed</u>	<u>Effective shutter speed</u>	<u>Efficiency</u>
1/200	3.75 ms = 1/270 s	79%
1/400	2.12 ms = 1/470 s	79%
1/600	1.50 ms = 1/670 s	79%
1/800	1.19 ms = 1/840 s	79%
1/950	1.00 ms = 1/1000 s	79%

The effective shutter speeds were determined with the lens at aperture f/4. The method is considered accurate within 3%. The technique used is Method I described in American National Standard PH3.48-1972(R1978).

### VI. Film Platen

The film platen mounted in Wild RC10 drive unit No. 1758-139 does not depart from a true plane by more than 13  $\mu$ m (0.0005 in.).

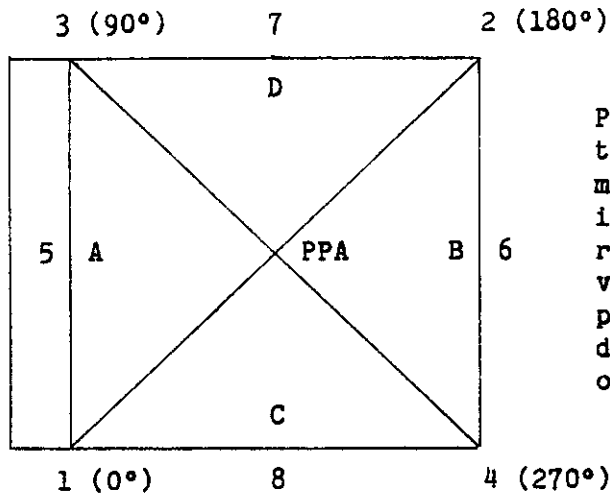VII. Principal Point and Fiducial Coordinates

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back or a contact positive with the emulsion up. The direction-of-flight fiducial marker or data strip is to the left.

	<u>X coordinate</u>	<u>Y coordinate</u>
Indicated principal point, corner fiducials	0.000 mm	-0.001 mm
Indicated principal point, midside fiducials	0.005	-0.008
Principal point of autocollimation	0.0	0.0
Calibrated principal point (point of symmetry)	0.006	0.011

Fiducial Marks

1	-105.992 mm	-106.006
2	106.001	106.015
3	-105.989	105.997
4	105.996	-106.006
5	-109.986	-0.021
6	110.004	0.004
7	0.007	110.000
8	0.002	-110.002

VIII. Distances Between Fiducial Marks

## Corner fiducials (diagonals)

1-2: 299.823 mm      3-4: 299.804 mm

Lines joining these markers intersect at an angle of 89° 59' 37"

## Midside fiducials

5-6: 219.990 mm      7-8: 220.003 mm

Lines joining these markers intersect at an angle of 89° 59' 32"

## Corner fiducials (perimeter)

1-3: 212.003 mm      2-3: 211.990 mm

1-4: 211.988 mm      2-4: 212.021 mm


The method of measuring these distances is considered accurate within 0.005 mm.

IX. Stereomodel Flatness

Magazine No.: 1758-139

Base/Height ratio: 0.6

Maximum angle of field tested: 40°

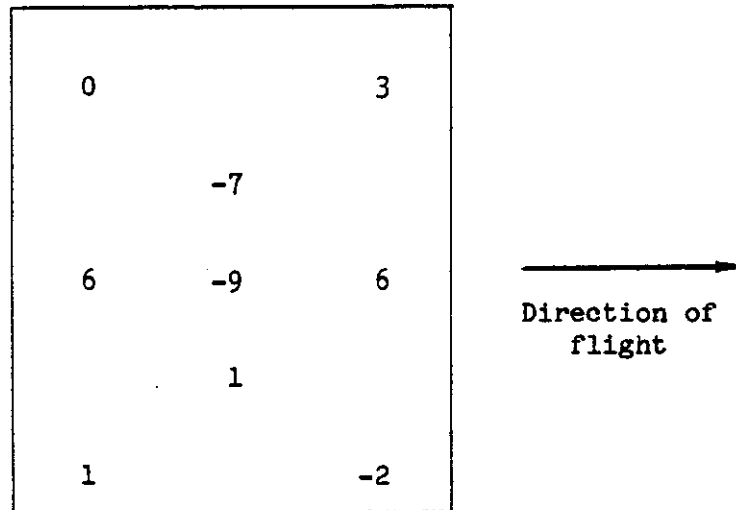

Stereomodel  
Test Point Array  
(values in micrometers)

The values shown on the diagram are the average departures from flatness (at negative scale) for two computer-simulated stereomodels based on comparator measurements on contact glass (Kodak micro flat) diapositives made from Kodak 2405 film exposures. These measurements are considered accurate within 5  $\mu$ m.

X. Resolving Power in cycles/mm

Area-weighted average resolution: 35.1

Film: Type 2405

Field angle:	0°	7.5°	15°	22.5°	30°	35°	40°
Radial lines	57	57	48	34	48	34	17
Tangential lines	57	40	34	34	34	34	28

This report supersedes the previous calibration of this camera contained in USGS Report of Calibration No. RT-R/582, dated January 9, 1980.

*William P. Tayman*  
William P. Tayman  
Chief, Optical Science Section  
National Mapping Division